


MULTY JET WATER METER CLASS 2 R160(CLASS C), TYPE P-MAX / MODEL MDC 15




Dial

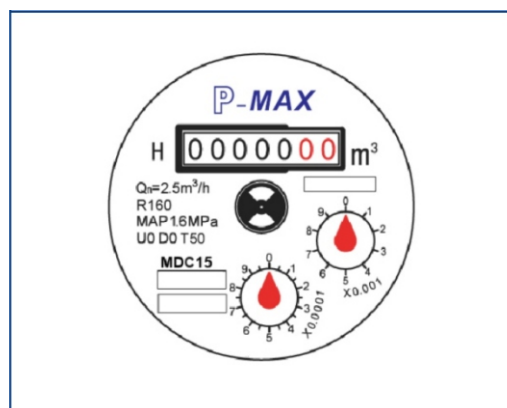


Features:

- Dry dial, Vacuum sealed to keep clean reading for long time .
- Available for cold water $0 \sim 50^\circ\text{C}$.
- Magnetic transmission.
- Antimagnetic type.
- 360° Rotating dial.
- Brass body can be painted.
- Ratio (Q_3/Q_1): 160 standard ISO 4064 .
- Maximum permissible error: $\pm 2\%$ in the upper zone and $\pm 5\%$ in the lower zone.
- Water pressure: MAP 1.6 MPa.
- Orientation installation: Horizontal.
- Thread connection: ISO 228-1-2000.


HEAD LOSS CURVE:

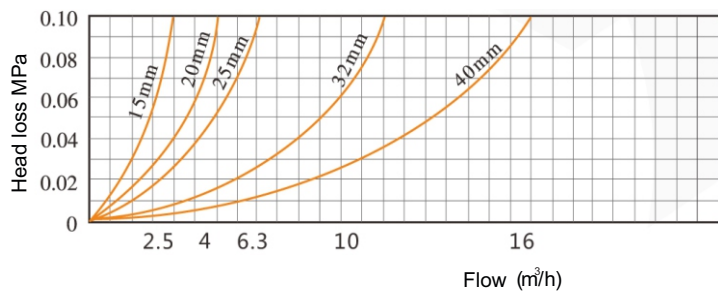


ERROR CURVE:

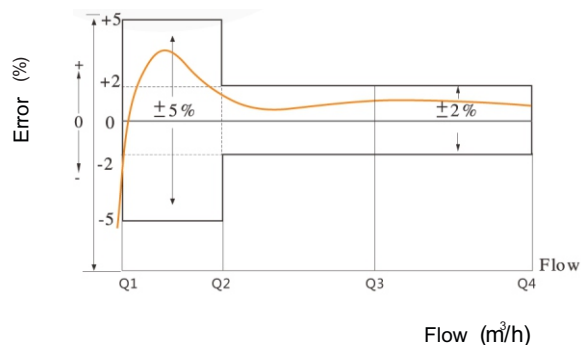

DIMENSION

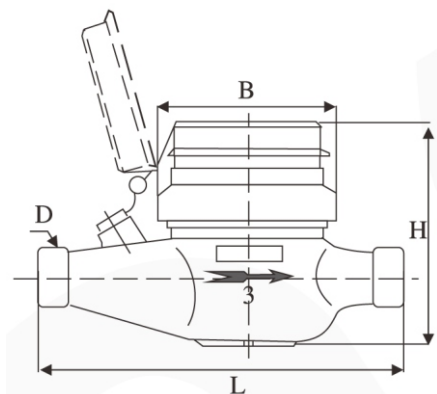

SIZE (mm)	B (mm)	H (mm)	D (inch)	L (mm)
MDC 15	81	100	3/4	165

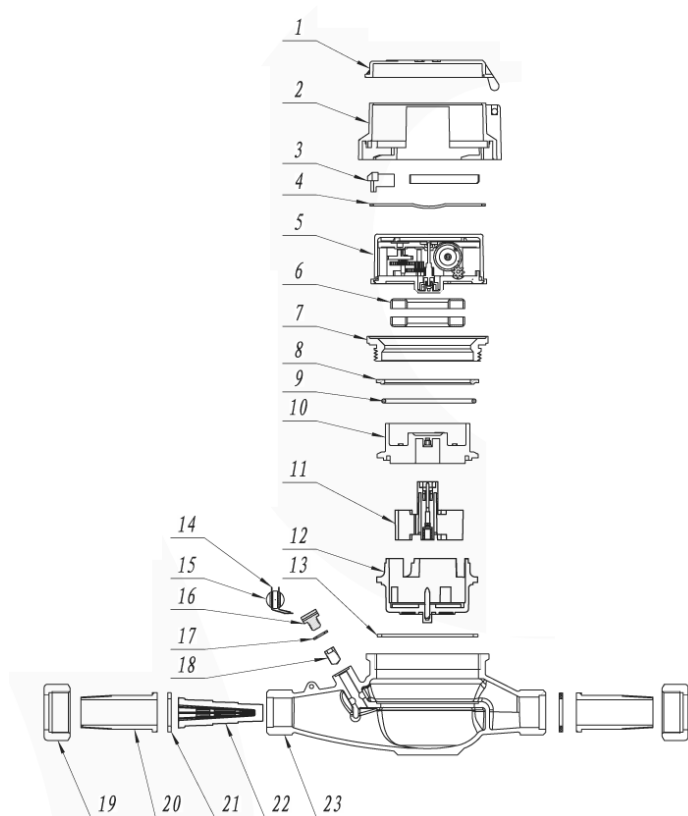

1	Lid
2	Cover
3	Insert
4	Washer
5	Register
6	Magnetic shield
7	Locking ring
8	Gasket
9	O-ring
10	Cover plate
11	Vane wheel
12	Chamber
13	Gasket
14	Wire
15	Lead seal
16	Adjusting screw
17	Gasket
18	Adjusting insert
19	Nut
20	Liner
21	Gasket
22	Filter
23	Meter body

MAIN TECHNICAL SPECIFICATIONS

TYPE / MODEL	SIZE (mm)	Class	Q ₄ Overload Flow	Q ₃ Permanent Flow	Q ₂ Transitional Flow	Q ₁ Minimum Flow	Minimum Reading	Maximum Reading
			m ³ /h		L/h		m ³	
P-MAX/ MDC 15	15	2	3.125	2.5	25	15.625	0.00005	99,999